


LightMUX™

CWDM and DWDM Passive Multiplexing

Optelian's LightMUX portfolio offers standardized passive multiplexing capabilities to address CWDM and DWDM applications. The modules provide service wavelength add/drop at Central Office (CO) facilities and along a linear path or ring for business services, FTTx connectivity, or residential broadband service distribution.

LightMUX offers an extensive set of passive elements to address terminal and add/drop requirements for the full 16-channel CWDM and 40-channel DWDM wavelength plans. The LightMUX offering includes OADMs, Mux-Demux pairs, Terminal Mux/Demuxes and Band OADMs. All LightMUX elements offer a 2% unidirectional (DWDM) or 2.5% bidirectional (CWDM) monitor port for ease of commissioning and troubleshooting. CWDM include 1310 or 1550 nm ports to enable overlays on legacy networks.

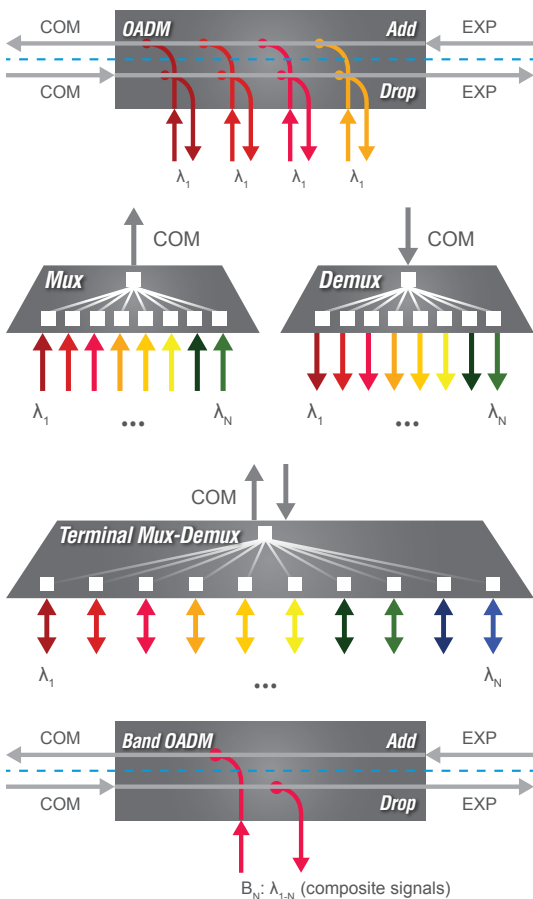

Element Types

OADM

Provides multiplexing and de-multiplexing of a subset of channels from the composite (line) in from one direction while allowing untargeted wavelengths to express through.

Mux and Demux Pairs

Provides multiplexing or de-multiplexing of a full system of channels aggregated on the composite (line) and are typically paired for network termination at COs or POPs.

Terminal Mux-Demux

Rack-mountable passive elements for multiplexing and de-multiplexing of a full 40-channel DWDM system aggregated on the composite (line) and are typically deployed for network termination at COs or POPs.

Band OADM

4-channel (DWDM) add/drop from the composite (line) but leaves the targeted 4-channels as a sub-composite signal, minimizing loss. These passives split off a set of wavelengths to address spurs in the network. Banded OADMs express untargeted wavelengths through.

CWDM Portfolio

		OADMs				Mux and Demux				
CH #	nm	1-channel	2-channel	4-channel	8-channel		Mux and Demux			16-channel
		1022-XXXX	1022-XXXX	1022-XXXX	1022-XXXX	Mux	Demux	Mux	Demux	1022-XXXX
1	1271	1101	1201	1401	1801	1901	1601	1701		
2	1291	1102								
3	1311	1103	1203							
4	1331	1104								
5	1351	1105	1205	1405	1809	1909	1829			
6	1371	1106						1206		
7	1391	1107	1207	1409	1809	1909	1829			
8	1411	1108								
9	1471	1109	1209	1413	1809	1909	1829			
10	1491	1110						1210		
11	1511	1111	1211	1413	1809	1909	1829			
12	1531	1112						1212		
13	1551	1113	1213	1413	1809	1909	1829			
14	1571	1114						1214		
15	1591	1115	1215	1413	1809	1909	1829			
16	1611	1116								
Form Factor		1-wide LGX Cassette								

Part Number ordering: 1022-XXXX where XXXX represents the specific element required as identified

CWDM Loss Specifications

Element Type	Add Losses (Ch. add to COM)							Drop Losses (COM to Ch. drop)				
	Ch. 1	Ch. 2	Ch. 3	Ch. 4	1310/1550	EXP-COM	COM-EXP	Ch. 1	Ch. 2	Ch. 3	Ch. 4	1310/1550
1-channel OADM	1.8	-	-	-	1.4	1.8	1.8	0.7	-	-	-	1.4
2-channel OADM	1.8	2.1	-	-	1.4	2.1	2.1	1.1	0.7	-	-	1.4
4-channel OADM	1.8	2.1	2.5	2.8	1.4	2.8	2.8	2.8	2.5	2.1	1.8	1.4

Element Type	Losses (MUX: Ch. add to COM / DMX: COM to Ch. drop)									
Channel	1	2	3	4	5	6	7	8	1310/1550	
8-channel MUX	1.8	2.1	2.5	2.8	3.2	3.6	3.9	4.3	1.4	
8-channel DEMUX	4.3	3.9	3.6	3.2	2.8	2.5	2.1	1.8	1.4	

Element Type	Losses (MUX: C. add to COM / DMX: COM to Ch. drop)															
Channel	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
16-channel MUX	1.2	1.6	1.9	2.3	2.6	3.0	3.4	3.7	4.1	4.5	4.8	5.2	5.5	5.9	6.2	6.6
16-channel DEMUX	6.6	6.2	5.9	5.5	5.2	4.8	4.5	4.1	3.7	3.4	3	2.6	2.3	1.9	1.6	1.2

All CWDM LightMUX elements offer a 2.5% bidirectional monitor port with 20db insertion loss, except for 16-channel Mux and Demux.

All CWDM models (except for the 16-channel Mux and Demux) include either a 1310 nm port (channel 9 - 16 only) or 1550 nm port (channel 1 - 8 only) for legacy network overlays.

DWDM Portfolio

CH #	nm	OADM				Mux/Demux Pairs		MDX-40 40ch Terminal Mux/Demux 1014-6700	Band OADM 4-channel 1022-XXXX	Band OADM 8-channel 1022-XXXX
		1-channel 1022-XXXX	2-channel 1022-XXXX	4-channel 1022-XXXX	8-channel 1022-XXXX	8-channel 1022-XXXX				
						Mux	Demux			
1	1530.33	2101	2201							
2	1531.12	2102								
3	1531.90	2103	2203		2401			4401		
4	1532.68	2104								
5	1533.47	2105	2205			2801	3801	3901	4801	
6	1534.25	2106								
7	1535.04	2107	2207		2405			4405		
8	1535.82	2108								
9	1536.61	2109	2209							
10	1537.40	2110								
11	1538.19	2111	2211		2409			4409		
12	1538.98	2112								
13	1539.77	2113	2213			2809	3809	3909	4809	
14	1540.56	2114								
15	1541.35	2115	2215		2413			4413		
16	1542.14	2116								
17	1542.94	2117	2217		2417					
18	1543.73	2118								
19	1544.53	2119	2219			2817	3817	3917	4817	
20	1545.32	2120								
21	1546.12	2121	2221		2421					
22	1546.92	2122								
23	1547.72	2123	2223							
24	1548.51	2124								
25	1549.32	2125	2225		2425					
26	1550.12	2126								
27	1550.92	2127	2227			2825	3825	3925		
28	1551.72	2128								
29	1552.52	2129	2229		2429					
30	1553.33	2130								
31	1554.13	2131	2231							
32	1554.94	2132								
33	1555.75	2133	2233		2433					
34	1556.56	2134								
35	1557.36	2135	2235			2833	3833	3933		
36	1558.17	2136								
37	1558.98	2137	2237		2437					
38	1559.79	2138								
39	1560.61	2139	2239							
40	1561.42	2140								
Form Factor				1-wide LGX	1-wide LGX	1-wide LGX	1-wide LGX	1U Rack	1-wide	1-wide

Part Number ordering: 1022-XXXX where XXXX represents the specific element required as identified

DWDM Loss Specifications

Element Type	Add Losses (Ch. add to COM)								Drop Losses (COM to Ch. drop)										
	Channel	1	2	3	4	5	6	7	8	EXP-COM	COM-EXP	1	2	3	4	5	6	7	8
1-channel OADM	1.4	-	-	-	-	-	-	-	-	1.0	1.0	1.4	-	-	-	-	-	-	-
2-channel OADM	1.4	1.9	-	-	-	-	-	-	-	1.5	1.5	1.9	1.4	-	-	-	-	-	-
4-channel OADM	1.4	1.9	2.4	2.9	-	-	-	-	-	2.1	2.1	2.9	2.4	1.9	1.4	-	-	-	-
8-channel OADM	2.6	3.1	3.6	4.1	4.6	5.0	5.5	6.0	-	1.3	1.3	6.0	5.5	5.0	4.6	4.1	3.6	3.1	2.6

Element Type	Losses (MUX: Ch. add to COM / DMX: COM to Ch. drop)								
	Channel	1	2	3	4	5	6	7	8
8-channel MUX		1.4	1.9	2.4	2.9	3.4	3.9	4.4	4.8
8-channel DEMUX		4.8	4.4	3.9	3.4	2.9	2.4	1.9	1.4

Element Type	Loss	Loss Uniformity
40-channel MUX/DEMUX	< 5.0 dB	< 1.5 dB

Element Type	Add Losses (Ch. add to COM)			Drop Losses (COM to Ch. drop)		
	Band	EXP-COM	COM-EXP	COM-EXP	Band	Band
4-channel Band OADM	1.7	1.2	1.2	1.2	1.7	1.7
8-channel Band OADM	1.8	1.3	1.3	1.3	1.8	1.8

All DWDM LightMux elements offer a 2% monitor port with 20 dB insertion loss.

Common Specifications

Parameter and Storage	Minimum	Maximum
Operating Temperature	-40°C / -40°F	+65°C / +149°F
Relative Humidity (Non-condensing)	5%	95%

Dimensions	Height		Width		Depth	
1-wide LGX cassette	10.2 cm	4.0 in	2.8 cm	1.1 in	15.5 cm	6.1 in
1U Rack (40-channel MUX/DEMUX)	4.3 cm	1.7 in	42.9 cm	16.9 in	27.9 cm	11 in

All CWDM and DWDM LightMux elements come standard with LC/PC connectors.

UNITED STATES

1700 Enterprise Way, SE, Ste. 101
 Marietta, GA 30067-9219
 T: +1 877 225 9428
 T: +1 770 690 9575

CANADA

1 Brewer Hunt Way
 Ottawa, Ontario K2K 2B5
 T: +1 613 287 2000
sales@optelian.com

